

BORN² BOND™



Instant Adhesives

Contents

OUR VISION

Collaborate and innovate to create smart adhesives that are safer, more flexible, efficient and responsive to the dynamic challenges of our environment.

Introduction to Bostik	3
Engineering Adhesives	4
Instant Adhesives	5
Instant Adhesives Range	6
Product Selector	8
1K Product Range	10
Ultra	11
Ultra Gel	12
Respect for the world and workplace	13
2K Product Range	14
Flex	15
Repair	16
Structural	17
Dual Cure Product Range	18
Light Lock	19
Surface Preparation	20
Booster and Primer	21
Supporting Products	22
Substrate Table	23
Best Practice Bonding	24
Product Features	26
Disclaimer	27



'A global leader in smart adhesives'

For over a century, we have developed smart adhesive solutions that touch and improve people's daily lives. Customers worldwide use our bonding systems in countless applications and across diverse sectors, including industrial manufacturing, construction, electronics, automotive, medical and packaging.

Our products are often invisible to the end-user, but every day they make a significant contribution to the creation of a safer, more efficient and sustainable world.

We are committed to innovation and continually invest in technological advances in our drive to develop ever more capable and adaptable 'smart' adhesives. This commitment is supported by our parent company, Arkema, a globally renowned manufacturer of specialty chemicals and advanced materials.

Through Arkema, we have access to a worldwide infrastructure and full supply chain, including innovative raw materials, sustainable sourcing and energy-efficient production capabilities.

GLOBAL FOOTPRINT

Bostik is one of the world's largest adhesive and sealant companies.



€2bn
worldwide sales

6,000
employees



55
countries



4
R&D centers

ARKEMA
INNOVATIVE CHEMISTRY

Bostik, an Arkema company

NEW ENGINEERING ADHESIVES

As engineering adhesive applications develop, they raise new challenges. These include questions of how to apply adhesives to ever-smaller and more complex items, how to accelerate curing processes and how to reduce waste, all while complying with environmental and health and safety regulations.

In response, we have developed a portfolio of ground-breaking engineering adhesives that focus on **'by-the-dot'** bonding applications. These products sit under the **Born2Bond™** brand – this name reflects our purpose and the collaborative bond we have with our customers.

OUR VALUES



INNOVATION



COLLABORATION



SAFETY &
SUSTAINABILITY

DESIGNED FOR USE IN MULTIPLE INDUSTRIES



AUTOMOTIVE



ELECTRONICS



LUXURY
PACKAGING



MEDICAL
DEVICES



MRO



Instant Adhesives

The first wave of **Born2Bond™** products is a collection of instant engineering adhesives.

To date, instant engineering adhesive performance and applications have been constrained by the limitations of existing cyanoacrylate technologies. Through a unique process, Bostik will unlock the potential of these technologies and develop a range of instant adhesives to deliver the high-performance, user-friendly properties engineers need.



LOW ODOR



LOW BLOOM



HIGH PERFORMANCE

PUSHING THE BOUNDARIES OF CYANOACRYLATE TECHNOLOGIES

**BORN²
BOND™**



	Standard ETHYL CA Products	Standard METHOXYETHYL CA Products	New BOSTIK Products
Reactivity: Fast Fixture Time	■	■	■
Flexibility	■	■	■
Gap Filling	■	■	■
Stability	■	■	■
Tensile Strength	■	■	■
Odor	■	■	■
Blooming	■	■	■

- Poor
- Moderate
- Excellent



† Patented in multiple countries.

INSTANT ADHESIVES RANGE

Available in a range of advanced formulations, our pioneering **Born2Bond™** Instant Adhesives overcome many of the performance and application limitations of existing solutions. Inspired by collaboration with our customers, these products address the challenges presented by today's ever-smaller, more complex products and demand for a high quality finish. They also facilitate faster, smarter production processes while prioritizing user safety and sustainability.



1K

1K PRODUCT RANGE

Born2Bond™ one-component products are available in varying viscosities and multiple sizes and formats ranging from 20g and 50g bottles designed for manual dispensing, to 500g bottles intended for use with automatic dispensing equipment. They are also available in gel form (5g and 20g aluminium tubes) to facilitate precision manual dispensing.



20g & 50g bottles for **ULTRA LV, MV & HV**

500g bottles for **ULTRA LV, MV & HV**

5g & 20g alu tubes for **ULTRA Gel**

2K

2K PRODUCT RANGE

Born2Bond™ two-component products are available in 10g syringes designed for manual dispensing and 50g syringes intended for use with dispensing guns. Both are compatible with disposable static mixers.



10g syringes for **FLEX, REPAIR & STRUCTURAL**

50g syringes for **FLEX, REPAIR & STRUCTURAL**

DUAL CURE

DUAL CURE PRODUCT RANGE

Born2Bond™ dual-cure (contact and light) products are available in medium-viscosity, high-viscosity and gel forms (5g and 20g aluminium tubes) to facilitate precision manual dispensing and 500g bottles intended for use with automatic dispensing equipment.



5g alu tubes for **LIGHT LOCK MV, HV & Gel**

20g alu tubes for **LIGHT LOCK MV, HV & Gel**

500g bottles for **LIGHT LOCK MV & HV**

PRODUCT SELECTOR


Please use the **Product Selector** below to identify the right solutions for your bonding requirements.



	PRODUCT PRE-SELECTOR		
	1K	2K	DUAL CURE
GAP FILLING	< 0.15mm	Up to centimeters	< 10mm*
FIXTURE TIME	5 - 15 sec	> 15 sec	< 5 sec*
OPEN TIME	+++	++	++
IMPACT RESISTANCE	+	+++	++

* For light curing

+ Moderate ++ Good +++ Excellent

DEFINITIONS	
GAP FILLING	Dispensing or injecting a one or two-component curing system, resulting in a soft or structural form-in-place elastomer or polymer, used as an adhesive, sealant or to fill a void.
FIXTURE TIME	Time taken to obtain a level of performance sufficient to hold a load with 1kg weight for 10 seconds.
OPEN TIME	Time during which one can assemble the two parts of an assembly and obtain the maximum properties.
IMPACT RESISTANCE	Ability to withstand intense force or shock applied to it over a short period of time. Impact resistance is an important consideration for fall protection equipment.

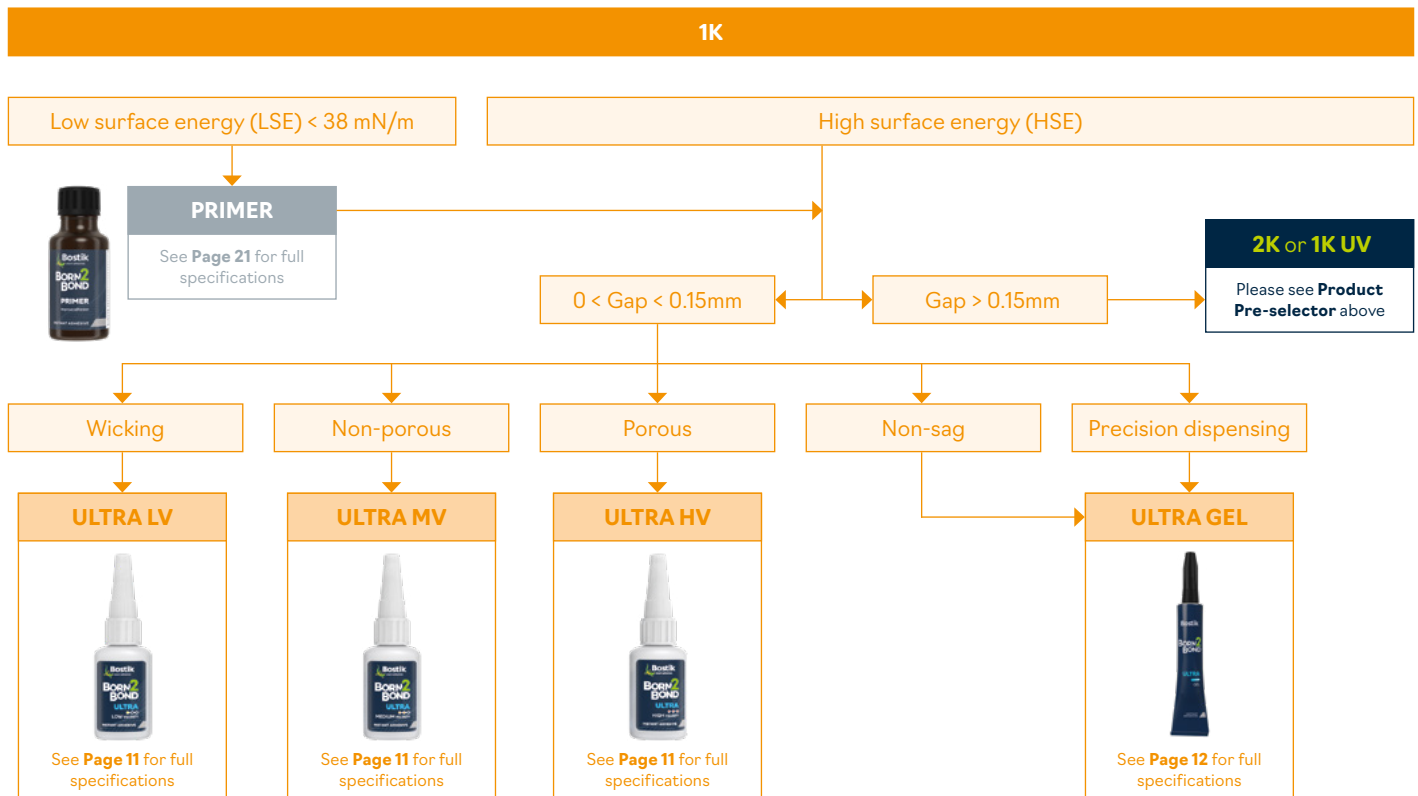

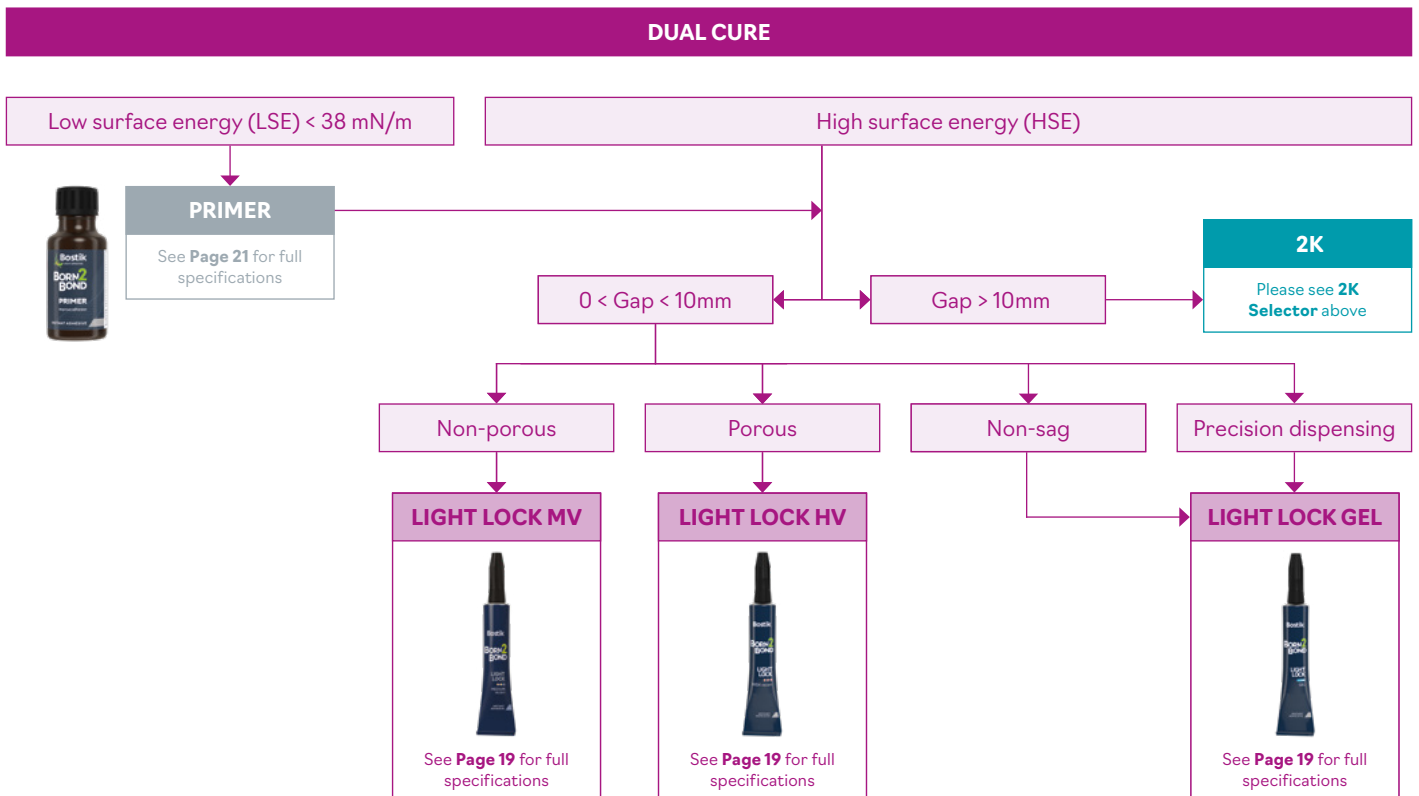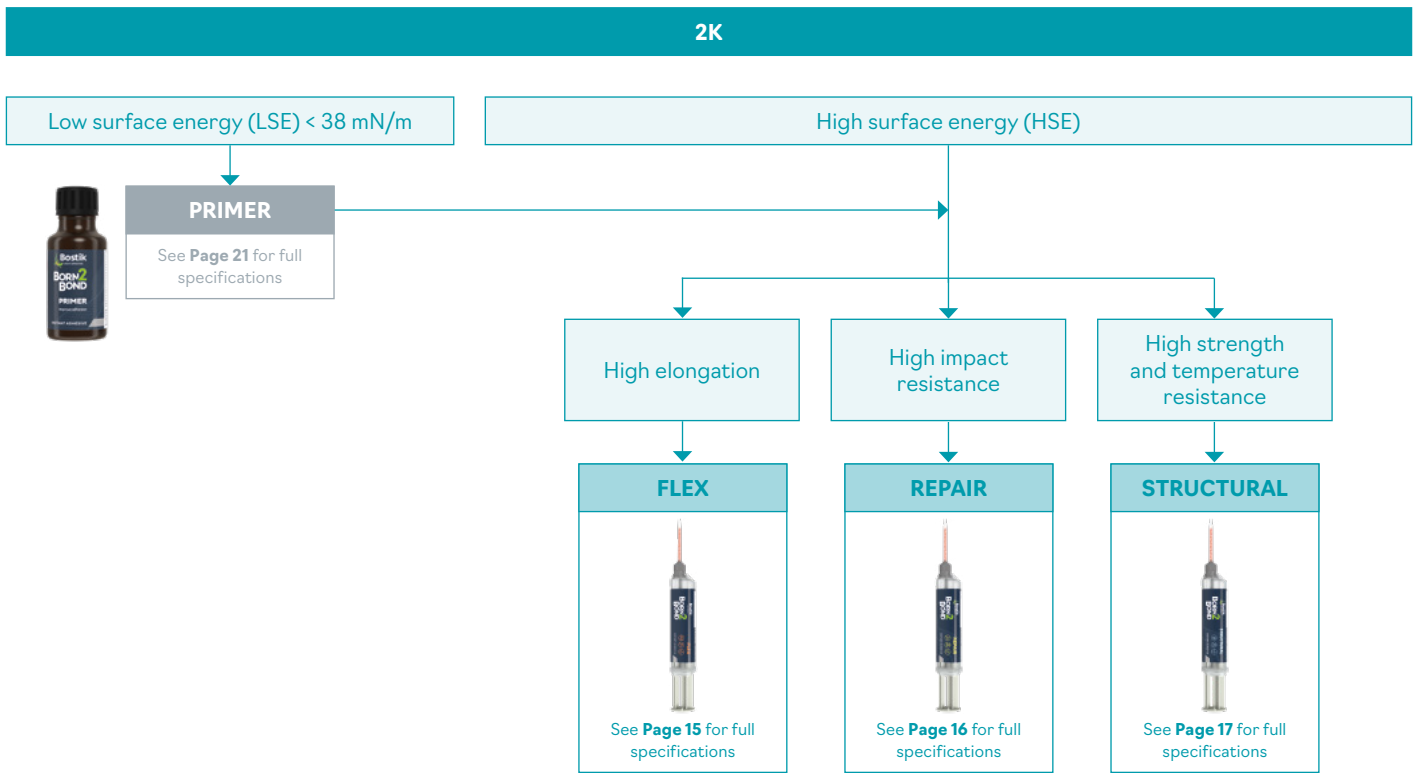

BORN² BOND™

1K Products



ULTRA



Multi-substrate Adhesion



Fast Bonding



Low-odor Technology


Born2Bond™ Ultra adhesives are low-odor, low-blooming, instant adhesives with a range of viscosities, specially designed for bonding most substrates including plastics, rubbers and metals. The formulation consistency has been designed for high bond strength, even in places that are subject to flexing. Careful selection of the formulation ingredients ensures that the product does not leave a white stain (blooming).

FEATURES

- Fixture time: 10 seconds*
- High bonding strength
- Long open time
- Low odor, low blooming
- Less brittle than conventional instant adhesives
- Bonds a large range of materials** including polystyrene
- Transparent and easy to use

TYPICAL APPLICATIONS

- Leather and rubber bonding
- Shoe assembly
- Automotive aftermarket applications
- Speaker assembly
- Plastic assembly

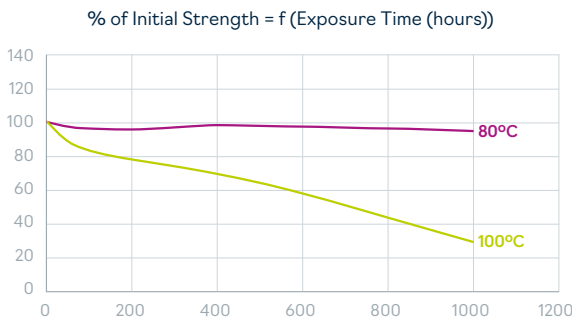

	ULTRA LV	ULTRA MV	ULTRA HV
BASE	Methoxyethyl Cyanoacrylate		
VISCOSITY (cP)	20 - 50 cP	120 - 170 cP	700 - 1,000 cP
FIXTURE TIME*	5-10 seconds	10 seconds	15 seconds
BOND STRENGTH	Grit-Blasted Mild Steel 14 MPa	Grit-Blasted Mild Steel 13 MPa	Grit-Blasted Mild Steel 11 MPa
APPEARANCE	Transparent		
TEMPERATURE RANGE	-40°C up to +80°C		
AVAILABLE IN	Bottles: 20g, 50g and 500g		

Choose the right solution using our **Product Selector on Page 8**

TDS and SDS available on request

ULTRA GEL



High Strength



Low-odor Technology



Flexible



Precision


Born2Bond™ Ultra Gel is a low-odor, low-blooming, instant adhesive specially designed for bonding most substrates including plastics, rubbers and metals. The formulation consistency has been designed for high bond strength, even in places that are subject to flexing. The gel consistency allows application in any orientation. Careful selection of the formulation ingredients ensures that the product does not leave a white stain (blooming).

FEATURES

- Fixture time: 5 seconds*
- High bonding strength
- Long open time
- Low odor, low blooming
- Peel resistance
- Bonds a large range of materials** including polystyrene
- Gel consistency for precise application

TYPICAL APPLICATIONS

- Leather and rubber bonding
- Shoe assembly
- Automotive aftermarket applications
- Sporting equipment
- Toy assembly
- Bonding glass to metal for jewelry

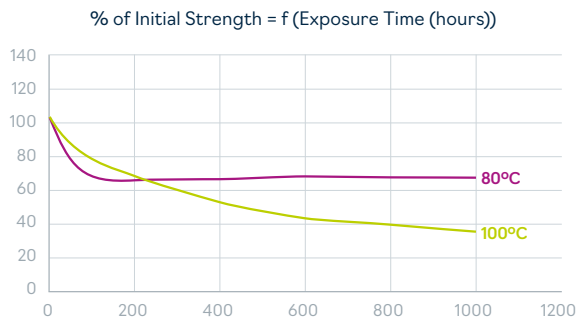

	ULTRA GEL
BASE	Methoxyethyl Cyanoacrylate
VISCOSITY (cP)	105,000 - 120,000 cP
FIXTURE TIME*	5 seconds
BOND STRENGTH	Grit-Blasted Mild Steel - 13 MPa
APPEARANCE	Transparent
TEMPERATURE RANGE	-40°C up to +80°C
AVAILABLE IN	Tubes: 5g, 20g

Choose the right solution using our **Product Selector on Page 8**

TDS and SDS available on request

Respect for the world and workplace

We are committed to developing sustainable adhesives and production methods and to protecting the wellbeing of our customers' workforces.

- Low-energy production processes
- Safer products
- Increased user comfort

2K Products



FLEX



Flexible & Elastic



Multi-substrate Adhesion



Low-odor Technology



Gap Filling



Precision



Impact Resistant


Born2Bond™ Flex is a patent-pending, flexible, elastic and low-odor instant adhesive with exceptional adhesion to a very broad range of materials and surfaces. It becomes a polymer (hardens) with more than 200% elongation with a working time (in mixer) of up to six minutes. It can be used for high-volumetric gap filling, achieving instant adhesion to most plastics, woods and metals as well as to porous and irregular surfaces.

FEATURES

- Fixture time in 60 seconds*
- Hardens in 5-10 minutes*
- Elongation > 200%
- Absorbs impacts and vibrations
- High peel strength
- Bonds a large range of materials** including glass
- Transparent, low odor, low blooming
- Gel consistency for precise application
- Non-sagging for vertical applications

TYPICAL APPLICATIONS

- Leather bonding for luxury clothing
- Sealing repair
- Elastic seam and joint sealing
- Flooring and panel bonding
- Vibration dampening
- Glass to rubber bonding

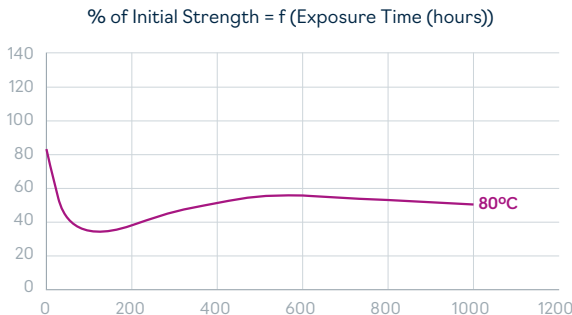

Choose the right solution using our **Product Selector on Page 8**

TDS and SDS available on request

	FLEX
BASE	Methoxyethyl Cyanoacrylate
VISCOSITY (cP)	Part A: 120,000 - 170,000 Part B: 70,000 - 130,000
OPEN TIME	6-10 minutes
FIXTURE TIME*	60 seconds
BOND STRENGTH	Grit-Blasted Mild Steel - 10 MPa
APPEARANCE	Transparent
TEMPERATURE RANGE	-40°C up to +60°C
GAP FILLING CAPABILITY	1cm
AVAILABLE IN	Syringes: 10g, 50g

REPAIR



Impact Resistant



Drillable & Sandable



Gap Filling



Multi-substrate Adhesion



Precision



High Strength


Born2Bond™ Repair is a patented[†], gap-filling, instant adhesive and repair product with excellent adhesion to a very broad range of materials and surfaces. Repair is ideal for instant bonding and repairing, because it combines the strength of a structural adhesive with the speed of an instant adhesive. A tough polymer is achieved within a hardening time of under 10 minutes, and the gel consistency enables application in any orientation.

FEATURES

- Fixture time in 60 seconds*
- Hardens in 5-10 minutes*
- Instant adhesion with high bonding strength
- Low volume shrinkage: 4.3%
- Fills gaps of large volumes
- Bonds a large range of materials**
- Machinable, sandable and paintable once hardened
- Impact resistant
- Gel consistency for precise application
- Non-sagging for vertical applications

TYPICAL APPLICATIONS

- Automotive aftermarket applications
- Wood repair and reconstruction
- Rubber joint bonding
- Automotive joint bonding
- Plastic defect repairing

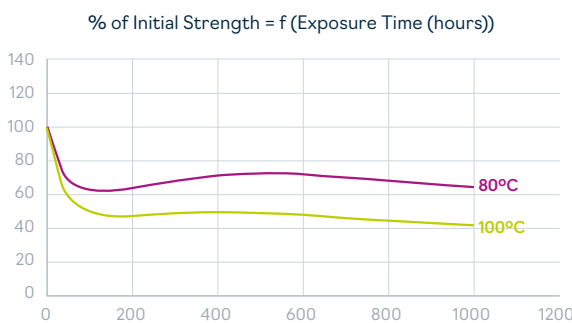

Choose the right solution using our **Product Selector on Page 8**



TDS and SDS available on request

	REPAIR
BASE	Ethyl Cyanoacrylate
VISCOSITY (cP)	Part A: 130,000 - 180,000 Part B: 70,000 - 130,000
OPEN TIME	4-10 minutes
FIXTURE TIME*	15-60 seconds
BOND STRENGTH	Grit-Blasted Mild Steel - 14 MPa
APPEARANCE	Whitish
TEMPERATURE RANGE	-40°C up to +80°C
GAP FILLING CAPABILITY	Centimeters
AVAILABLE IN	Syringes: 10g, 50g

[†] Patented in multiple countries.

STRUCTURAL



Long Open Time



High Strength



Gap Filling



Repositionable



Precision



Multi-substrate Adhesion



Impact Resistant


Born2Bond™ Structural is a patent-pending, high-strength hybrid adhesive that provides a fast fixture time at room temperature while maintaining good processability and bond gaps up to 5mm. This product offers excellent bonding characteristics to a large variety of closed substrates, such as aluminum, steel, plastics and elastomers as well as porous substrates, such as woods, chipboard and leather. **Born2Bond™ Structural** is formulated for applications that require mechanical and in-use environmental resistance.

FEATURES

- Fixture time in 30 seconds*
- High adhesion strength: > 6 MPa after 5 minutes
- Open time of 25 minutes
- Fills gaps up to 5mm
- Excellent adhesion to many different substrates**
- Transparent when cured
- Temperature and humidity resistance
- Gel consistency for precise application

TYPICAL APPLICATIONS

- Structural bonding
- Magnet bonding
- Plastic to metal bonding
- Bonding glass to leather

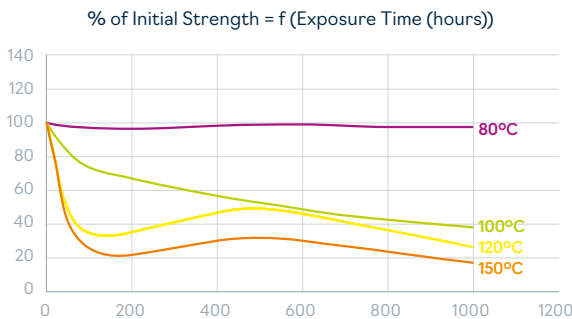

Choose the right solution using our **Product Selector on Page 8**

TDS and SDS available on request

	STRUCTURAL
BASE	Hybrid CA & Acrylate
VISCOSITY (cP)	Part A: 100,000 - 150,000 Part B: 40,000 - 80,000
OPEN TIME	25 minutes
FIXTURE TIME*	30 to 90 seconds
BOND STRENGTH	Grit-Blasted Mild Steel - 14 MPa
APPEARANCE	Transparent
TEMPERATURE RANGE	-40°C up to +120°C
GAP FILLING CAPABILITY	5mm
AVAILABLE IN	Syringes: 10g, 50g

Dual Cure Products



LIGHT LOCK



Light & Surface (Dual) Cure



Repositionable



Gap Filling



Low-odor Technology



Fast Bonding



Multi-substrate Adhesion


Born2Bond™ Light Lock HV and Gel are patented[†], low-odor, low-blooming, dual-curing (contact and light curing) cyanoacrylate adhesives. They are designed for bonding applications that require fast fixturing, coating or surface cure. The UV and visible-light cure sensitivity allow rapid bonding through transparent parts and quick curing of light-exposed bulk or surface-coated areas. Further, the product's instant bonding capability ensures cure between opaque substrates (contact cure).

FEATURES

- Dual cure formulation: instant and photo-cure
- Fixture time in 60 seconds without light exposure, and 5 seconds with light curing
- Can be cured with visible and UV-LED light
- Long open time without activation
- Dry to touch, tack free surface cure
- Cure-on-demand of excess material released from bondlines
- Bonds, fills, reconstructs and coats
- Low odor, low blooming
- Available in a range of viscosities: MV, HV and GEL

TYPICAL APPLICATIONS

- Conformal coating
- Encapsulation
- Electronics assembly
- Glass, metal and plastic bonding

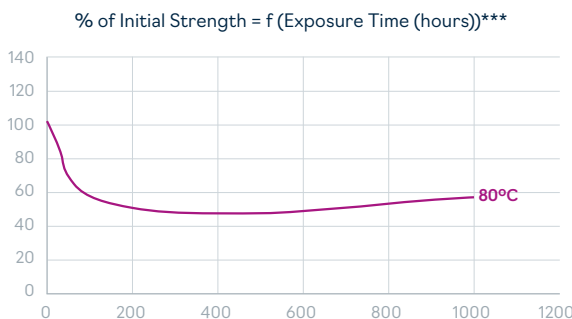

***Information in graph above is for Light Lock Gel only.

Choose the right solution using our **Product Selector on Page 8**



TDS and SDS available on request



	MV	HV	GEL
BASE	Light Curing Methoxyethyl Cyanoacrylate		
VISCOSITY (cP)	180 - 220	600 - 900	30,000 - 45,000
BOND STRENGTH	Grit-Blasted Mild Steel - 2 MPa	Grit-Blasted Mild Steel - 6 MPa	Grit-Blasted Mild Steel - 5 MPa
APPEARANCE	Transparent after cure		
TEMPERATURE RANGE	-40°C up to +80°C		
AVAILABLE IN	Tubes: 5g, 20g and Bottle: 500g (MV and HV only)		

[†] Patented in multiple countries.

Surface Preparation



SURFACE PREPARATION

Born2Bond™ Booster is a surface preparation product that accelerates cyanoacrylate curing and is specially designed for curing on wood and plastic surfaces. Its long open time and short drying time makes it an ideal choice for professionals. Unlike other accelerators, **Born2Bond™ Booster** is particularly suitable for promoting quick adhesion when joining parts that are immediately subjected to high stress, like edge coating or shoe soles.

FEATURES

- Increases curing speed of cyanoacrylate adhesives on acidic woods and porous substrates
- Dries in seconds
- Open time: 24 hours
- Transparent
- Easy to use

TYPICAL APPLICATIONS

- Preparation of surfaces
- Acceleration of bonding for wood, leather and vertical surfaces



Choose the right solution using our [Product Selector](#) on [Page 8](#)

TDS and SDS available on request

Born2Bond™ Primer is used to make polyolefin and other low surface energy substrates suitable for bonding with cyanoacrylate adhesives. It is only recommended for difficult-to-bond substrates, which include polyethylene, polypropylene, polytetrafluoroethylene (PTFE) and thermoplastic rubber materials. **Born2Bond™ Primer** is not recommended in assemblies where high peel strength is required.

FEATURES

- Improves adhesion to difficult-to-bond substrates
- Specially formulated for adhesion of polyolefins
- Suitable for use with other cyanoacrylates
- Dries in seconds
- Increases adhesion strength

TYPICAL APPLICATIONS

- Preparation of surfaces
- Bonding of difficult-to-bond plastics and polyolefins



Choose the right solution using our [Product Selector](#) on [Page 8](#)

TDS and SDS available on request

SUPPORTING PRODUCTS

In conjunction with our **Born2Bond™** adhesives, we offer a variety of products to help you optimize substrate preparation and application processes.

Bostik Cleaner* is a powerful preparation agent that is highly suitable for cleaning and degreasing substrates before applying **Born2Bond™** products.

FEATURES

- Elevated evaporation rates
- 'No stress-cracking' on plastic
- Easily diluted for use
- High efficiency for degreasing

TYPICAL APPLICATIONS

- Cleaning and degreasing of a variety of substrates



Choose from a complete range of **dispenser guns** and **disposable static mixers**.



DISPENSER GUNS

- Minimum trigger pressure for effortless use
- Ergonomic design for comfort and minimum fatigue



DISPOSABLE STATIC MIXERS

- Ensures optimal mixing of two-component adhesives
- Variants available for both 10g and 50g syringes

SUBSTRATE TABLE

To help you select the best **Born2Bond™** product for your needs, this table shows the bonding compatibility between different substrate types and adhesives within the **Born2Bond™** range.

	ULTRA LV	ULTRA MV	ULTRA HV	ULTRA GEL	REPAIR	STRUCTURAL	FLEX	LIGHT LOCK MV	LIGHT LOCK HV	LIGHT LOCK GEL
ABS Acrylonitrile-butadiene-styrene	***	***	***	***	***	***	***	***	***	***
PC Polycarbonate	***	***	***	**	***	***	***	***	***	***
PC/ABS Blend of PC and ABS	***	***	***	**	***	***	***	***	***	***
PE Polyethylene	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)
PMMA Poly(methyl methacrylate)	***	***	***	***	***	***	***	***	***	***
PP Polypropylene	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)
PPO Poly(phenylene oxide)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)
PS Polystyrene	**	**	**	**	*	**	**	**	**	**
PS Polystyrene (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)	*** (with Primer)
PU Polyurethane	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)
PVC Polyvinyl chloride	***	***	***	***	***	***	***	***	***	***
TPU Thermoplastic polyurethane	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)
AL Aluminum	**	**	**	**	**	***	**	**	**	**
Coated AL Powder coated or anodized aluminum	**	**	**	**	**	***	**	**	**	**
GL Glass	**	**	**	**	**	***	**	*	*	**
Si Silicone	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)	** (with Primer)
SUS Stainless steel	***	***	***	***	***	***	***	***	***	***
Mild Steel	***	***	***	***	***	***	***	***	***	***
GBMS Grit blasted mild steel	***	***	***	***	***	***	***	***	***	***

Compatibility: * Moderate ** Good *** Excellent

BEST PRACTICE BONDING

Substrate and Surface Preparation

The nature of the substrate and its surface impacts the bondline performance.

- The surface must be cleaned with the appropriate cleaner to eliminate surface contaminants and increase wettability before applying the adhesives. We recommend **Bostik Cleaner**, or, as a minimum, an alcohol wipe.
- Mechanical pretreatment (sanding, grinding, laser etching, etc.) will eliminate surface contaminants and increase surface roughness to enhance bonding performance.
- Bonding performance can vary depending on the surface energy of the substrate. Applying **Born2Bond™ Primer** will improve adhesion on low surface energy substrates (< 38 mN/m) (e.g. plastics, PPE).
- Fixture time varies with different types of substrates. Applying **Born2Bond™ Booster** will accelerate fixture time on acidic and porous substrates.



Service Conditions

The performance of the adhesive is driven by the service conditions and stress that the bondline will be exposed to:

- **Load:** cyclical or steady
- **Temperature:** cyclical or steady
- **Chemicals:** motor oil, solvents, etc.
- **Humidity:** constant or accidental


Please refer to our product selector and technical data to choose the right product.

Designing with Adhesives

There are five major types of stress that affect the bondline (see diagram below).

Types of Stresses

- a: Compression
- b: Tension
- c: Shear
- d: Peel
- e: Cleavage
- f: Torsional

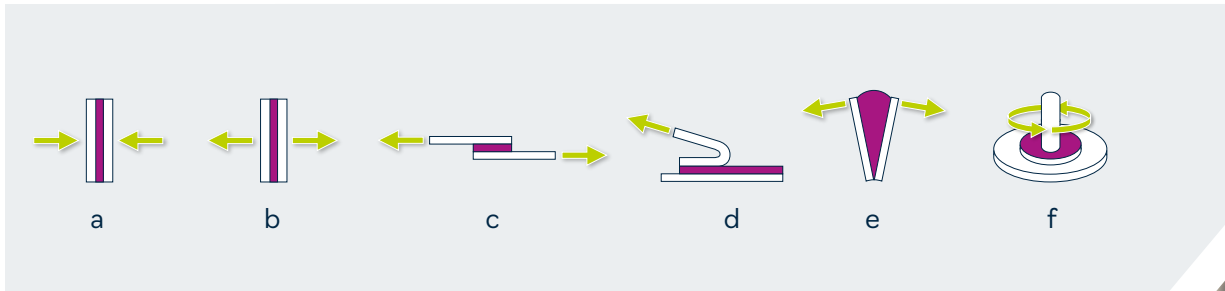


- Adhesives are strong in shear strength but weaker in peel and cleavage strength (see diagram above)
- Consideration of the gap is important; a thinner gap provides a stronger bondline and helps to speed up curing time
- Joints must be designed based on the load the bondline will be exposed to. For higher loads, try to maximize the bonding area for increased strength

Application Process

The method in which adhesive is applied impacts bondline performance.

- Bondline performance depends on the quantity and consistency of adhesive applied to the surface.
- Adhesives can be applied using automatic dispensing equipment and/or manual systems (e.g. syringes, guns, bottles).
- Fully automated systems will improve the control and speed of dispensing.

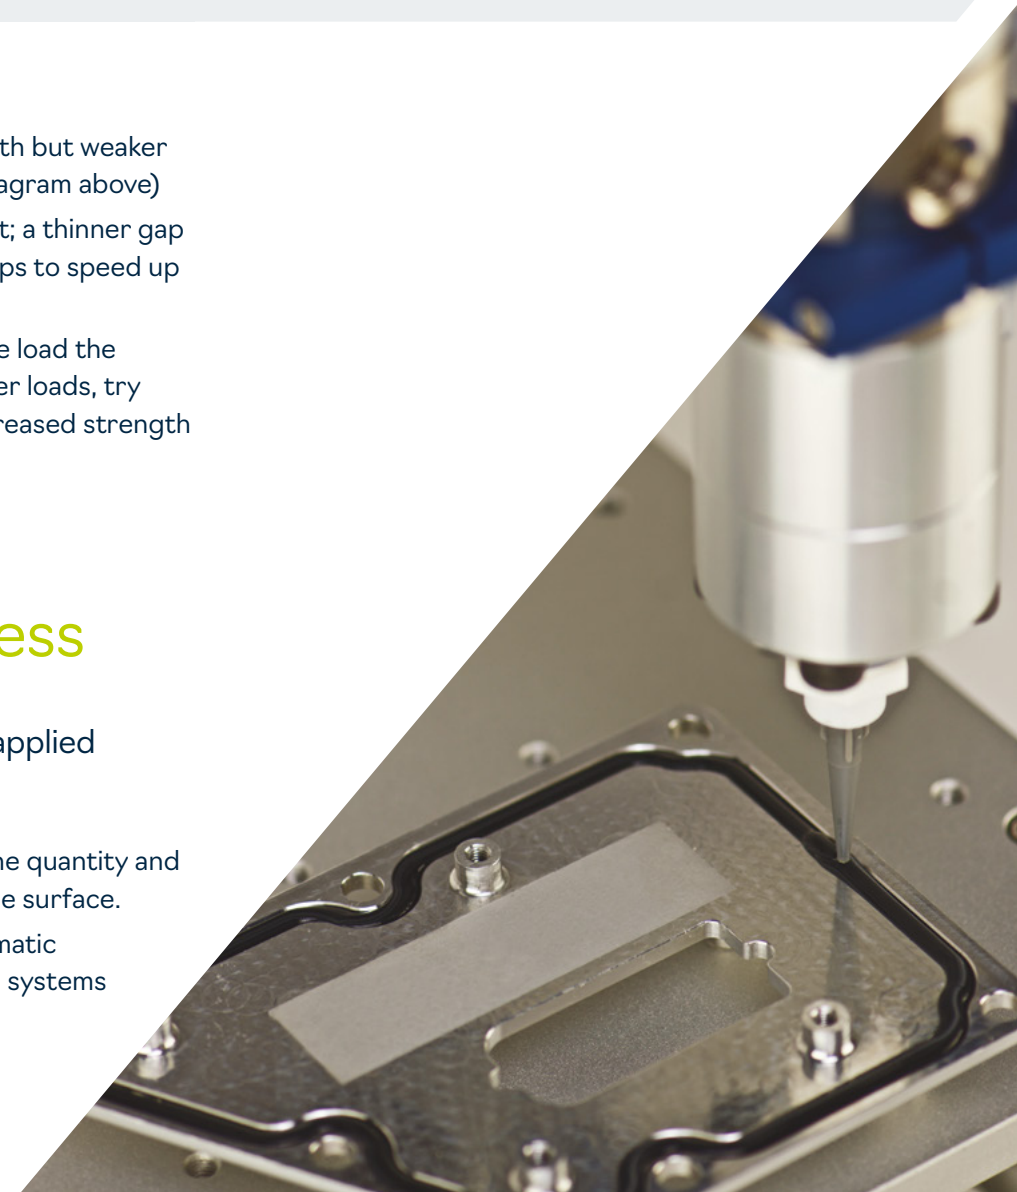

PRODUCT FEATURES

The list of features in this table will help you identify which products best match your needs.

	ULTRA LV	ULTRA MV	ULTRA HV	ULTRA GEL	REPAIR (4:1)	STRUCTURAL (4:1)	FLEX (4:1)	LIGHT LOCK MV	LIGHT LOCK HV	LIGHT LOCK GEL
CHEMISTRY	MECA	MECA	MECA	MECA	ECA (A) Plasticizer (B)	Blend MECA-ECA	MECA (A) Plasticizer (B)	MECA	MECA	MECA
APPEARANCE	Transparent	Transparent	Transparent	Transparent	Whitish	Transparent	Transparent	Transparent greenish	Transparent yellowish	Transparent yellowish
VISCOSITY (cP) 25°C (77°F)	20 - 50	120 - 170	700 - 1,000	105,000 - 120,000	Part A: 130,000 - 180,000 Part B: 70,000 - 130,000	Part A: 100,000 - 150,000 Part B: 40,000 - 80,000	Part A: 120,000 - 170,000 Part B: 70,000 - 130,000	180 - 220	600 - 900	30,000 - 45,000
OPEN TIME	N/A	N/A	N/A	N/A	4 - 10 min	25 min	6 - 10 min	N/A	N/A	N/A
TEMPERATURE USE RANGE	-40°C up to +80°C	-40°C up to +80°C	-40°C up to +80°C	-40°C up to +80°C	-40°C up to +80°C	-40°C up to +120°C	-40°C up to +60°C	-40°C up to +80°C	-40°C up to +80°C	-40°C up to +80°C
FIXTURE TIME (S) - MILD STEEL	5	5	5	5	5	15	30	10	10	10
FIXTURE TIME (S) - ABS	10	10	10	10	30	35	45	10	20	20
FIXTURE TIME (S) - PC	15	20	25	20	30	40	60	15	30	40
TENSILE STRENGTH (MPA) (GBMS)	14	13	11	13	14	14	10	8	6	5
ELONGATION AT BREAK (%)	N/A	N/A	N/A	N/A	12	16	259	N/A	N/A	N/A
IMPACT RESISTANCE (AFTER 24H) (KJ/M²) ISO 9653	9.4	9.5	9	6.4	15	27	21	14.1	13	16.3

ECA: ethoxyethyl cyanoacrylate MECA: methoxyethyl cyanoacrylate



Bostik offers this Product Catalogue for descriptive and informational use only. The Product Catalogue is not a warranty, a contract or a substitute for expert or professional advice.

The statements, technical information and recommendations contained herein are not exhaustive, are believed to be accurate as of the date hereof, and are not warranted or guaranteed in any way. They represent typical results for the products and are based on Bostik's research only. The Product Catalogue relies upon your knowledge and input, and as such, its results are based solely upon the information you provide and the choices that you make. Since the conditions and methods of use of the products and the information relied upon by you are beyond our control, Bostik expressly disclaims any and all liability and damages that may arise from any use of the Product Catalogue, the products, the results therefrom, or reliance on the information contained herein.

The Product Catalogue is one of several tools that may be used to help you find the product best suited for your needs. It is used at your own risk, and by using it, you are knowingly accepting and assuming any and all risks associated with its use, the recommendations contained in it, any output and your selections. The performance of the product, its shelf life, and application characteristics will depend on many variables, including but not limited to the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application, among other things. Any change in any of these variables can affect the product's performance. You are responsible to test the suitability of any product in advance for any intended use. Bostik does not guarantee the reliability, completeness, use, or function of the Product Catalogue or any recommendations arising therefrom. The data and information contained in the Product Catalogue is provided 'AS IS'.

The information provided herein relates only to the specific products designated and may not be applicable when such products are used in combination with other materials or in any process. **Bostik encourages you to always read and understand (1) the Technical Data Sheet ("TDS") and (2) the Safety Data Sheet ("SDS") for all products, which are located on our corporate website or are available upon request.** You are welcome and encouraged to contact your customer service representative to discuss your specific requirements and to determine what product is appropriate for you and your applications.

Nothing contained herein constitutes a license to practice under any patent, and it should not be construed as an inducement to infringe any patent. You are advised to take appropriate steps to be sure that any proposed use of the products will not result in patent infringement.

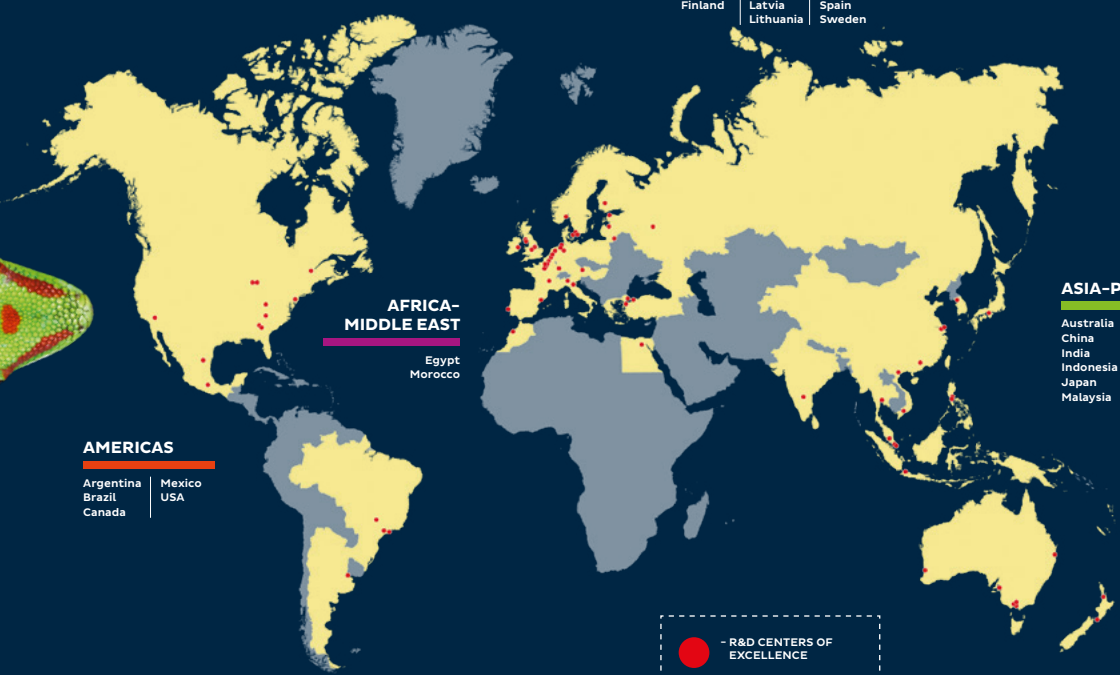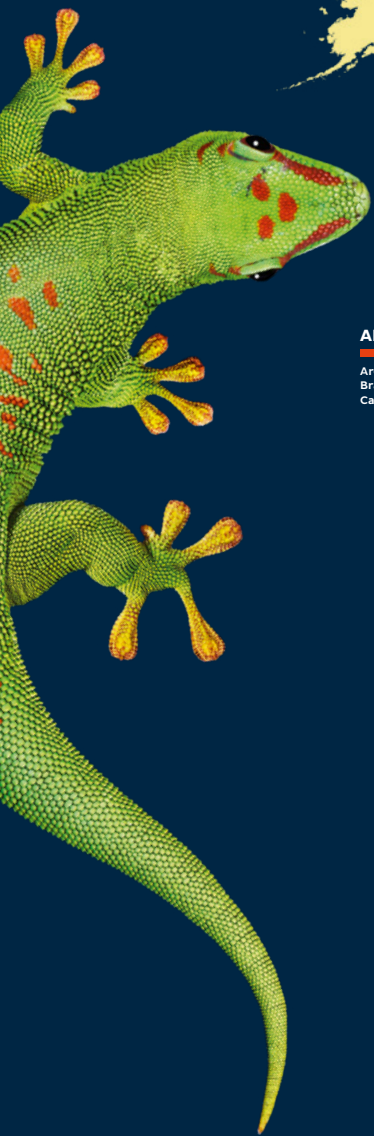

EUROPE

- | | | | |
|---------|-----------|----------|-----------------|
| Austria | France | Norway | The Netherlands |
| Belgium | Germany | Poland | Turkey |
| Denmark | Ireland | Portugal | UK |
| Estonia | Italy | Russia | |
| Finland | Latvia | Spain | |
| | Lithuania | Sweden | |

AFRICA-MIDDLE EAST

- Egypt
- Morocco

ASIA-PACIFIC

- | | |
|-----------|-------------|
| Australia | New Zealand |
| China | Philippines |
| India | Singapore |
| Indonesia | South Korea |
| Japan | Thailand |
| Malaysia | Vietnam |

AMERICAS

- | | |
|-----------|--------|
| Argentina | Mexico |
| Brazil | USA |
| Canada | |

 BOSTIK PRESENCE

-  R&D CENTERS OF EXCELLENCE
-  OFFICES
-  FACTORIES
-  TECHNICAL CENTERS

DISTRIBUTED BY
FINAL
+ADVANCED MATERIALS
www.final-materials.com
+33 3 67 78 78 78